

1.1 Professional area International

Product profile

for security doors

Standard version

- With transmission
- Backset 60 mm
- Centres 72 mm for 4829 profile cylinder
- Centres 74 mm for 4839 round cylinder
- Forend 235x25 mm, rectangular
- Forend satin stainless steel
- Clamp follower 8 mm
- Antifriction lever latch
- Single throw deadbolt, 24 mm
- With anti-thrust latch



Options

- Forend polished stainless steel
- Forend in satin brass
- Forend polished brass

Quality standard

- Firetested by BRE up to 4 hours
- Certified ANSI/BHMA 156.13, grade 1, at ITS in USA

Heavy duty security mortice lock 4829-4839 with antifriction lever latch

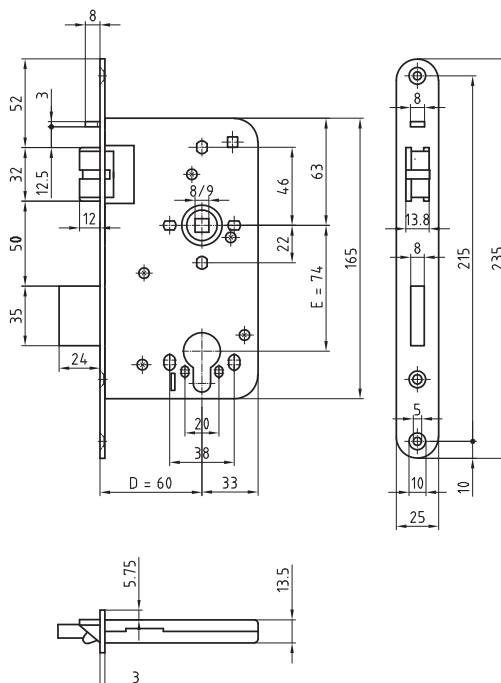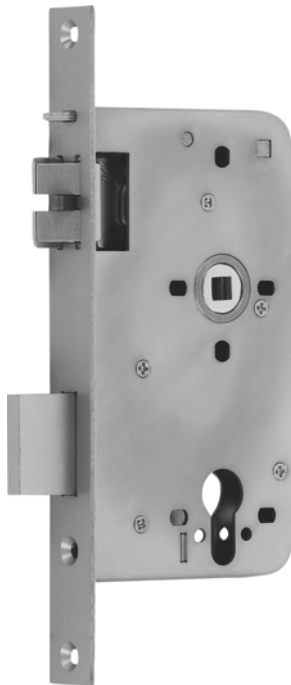

SL-4011.000.13
Striking plate



SL-4081.000.13
Striking plate